


TWIN-CAL IP67

Welcome to the new generation of TESA electronic calipers, with the highest degree of protection ever offered.

The TWIN-CAL IP67 are all equipped with TLC (TESA Link Connector), the unique integral data output facility, providing the opportunity to upgrade your caliper at any time.

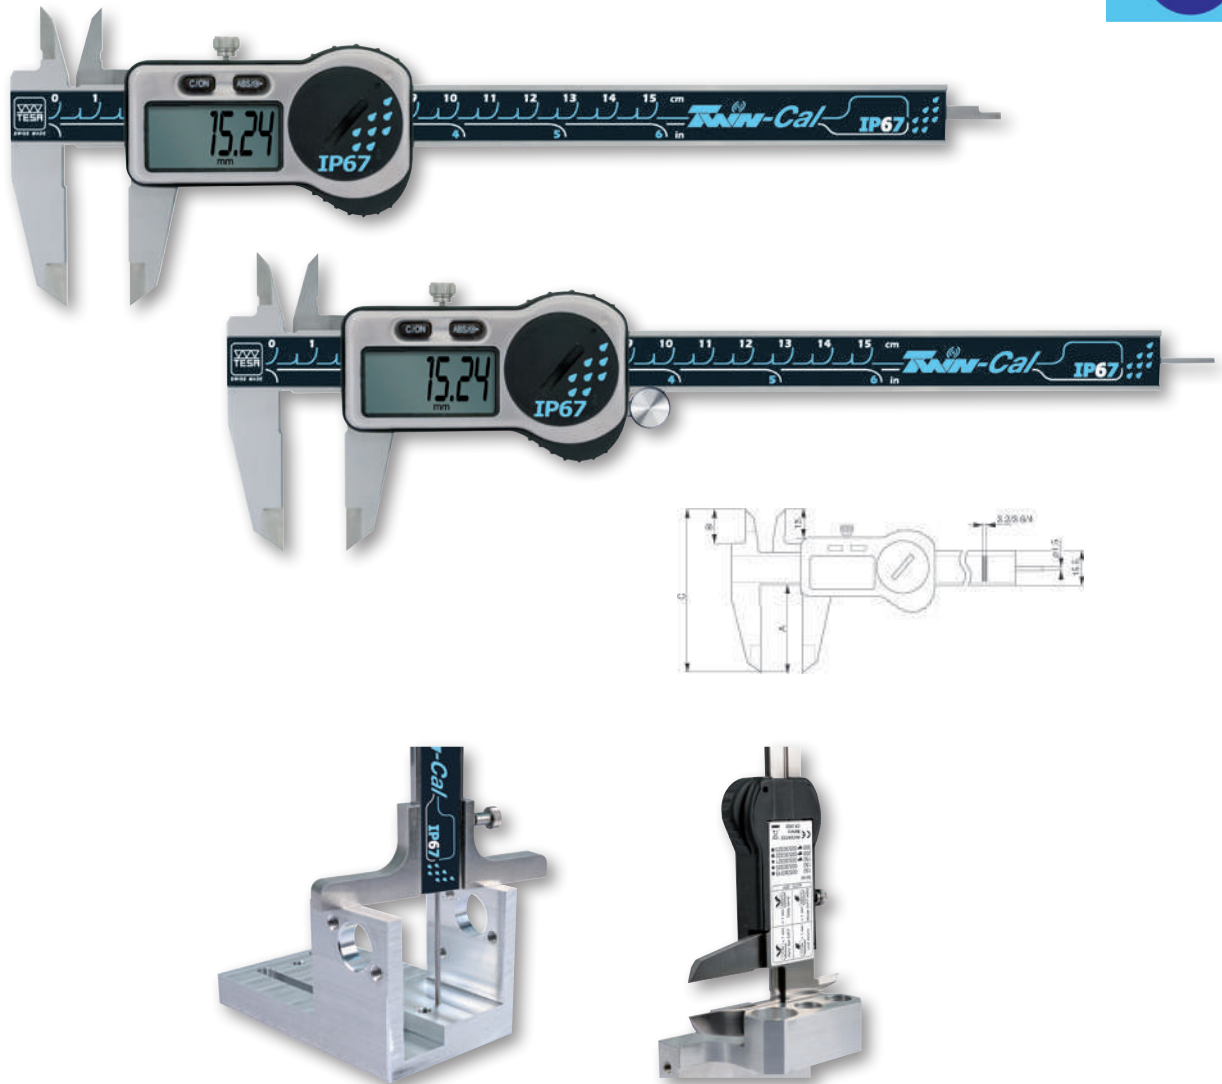

-  ISO 13385-1
-  0,01 mm / 0.0005 in
-  LCD, 11 mm
-  Floating zero
-  mm / in conversion
-  ≤ 100 mm: 20 μm >100 mm: 30 μm
-  10 μm
-  Scale with incremental divisions, inductive
-  2,5 m/s
-  TLC Connectivity
-  Stainless steel
-  Lithium battery, 3V, CR2032
-  12.000 hours
-  Standby mode after 10 minutes, instrument retains the zero position. Automatic shut off after 2 hours, instrument retains the zero in ABS mode, but the zero must be reset if the instrument is in DIFF mode.
-  -10°C to 60°C
-  10°C to 40°C
-  100 %
-  IP67
-  1907/2006/CE 2004/108/CE 2002/96/CE
-  Plastic storage case
-  Inspection report and declaration of conformity
-  Serial number identification

No	mm	in	Drive system / Thumb Roller	A mm	B mm	C mm	g	Depth rod
00530319	150	6	–	40	16	74	150	Square
00530320	150	6	–	40	16	74	150	Round
00530321	150	6	With	40	16	74	150	Round
00530322	200	8	With	50	20	90	200	Square
00530323	300	12	With	64	22	106	280	Square

OPTIONAL ACCESSORIES:

00560013	Depth foot for calipers up to 150 mm
01961000	Lithium battery, 3V, CR2032
04760180	TESA TLC-TWIN wireless emitter-receiver Compatible with any instrument fitted with a TLC – TESA Link Connector
04760181	TESA TLC-USB cable for instruments with a TLC connector
04760182	TLC-DIGIMATIC cable for instruments with a TLC connector

